

# Agilent TPS-mini




A small and compact, easy-to-use, integrated dry vacuum system, featuring the new Agilent TwisTorr 74 FS Turbo Pump with improved vacuum performance, backed by a dry 10 L/min diaphragm pump. Operability in any position, no maintenance required. Active Gauge capability, large pressure display, PC connection. Universal voltage (90V/240V), CE/CSA certified.

## **Technical Specifications**


		KF 40	ISO 63	CFF 4.5 in.	
Pumping Speed (L/s) (with inlet screen)	N <sub>2</sub>	37	48	48	
	Не	29	44	44	
	H <sub>2</sub>	23	32	32	
Base pressure*		2 x 10 <sup>-7</sup> mbar	2 x 10 <sup>-7</sup> mbar	5 x 10 <sup>-8</sup> mbar	
Bakeout temperature		80 °C at inlet	80 °C at inlet	120 °C at inlet	
Pumpdown time (1 liter volume)	60 sec. to 17 mbar; 114 sec. to 1 x 10 <sup>-4</sup> mbar; 140 sec. to 5 x 10 <sup>-5</sup> mbar				
Turbo pump rotational speed	70.000 RPM				
Start-up time	122 sec.				
Operating position	Vertical, Horizontal, Upside down position				
Operating ambient temperature	5 °C to 35 °C / 32 °F to 122 °F				
Input Voltage and Frequency	90V to 240V AC; 50 Hz / 60 Hz				
Maximum input power	220 VA				
Serial communications	RS-232 cable, 9-pin D-type male, 9-pin D-type female, A-Plus Software				

\* According to standard DIN 28 428

### **Pumping Speed vs Inlet Pressure**

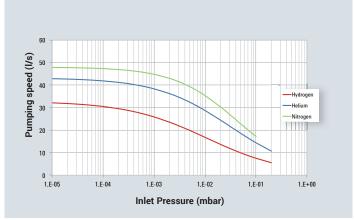

### Pressure vs Time (with a pump down vol. of 1 L)

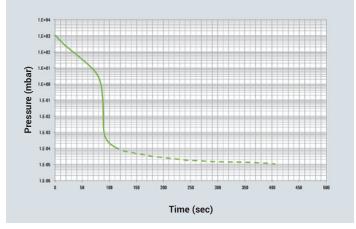

Dimensions: millimeters [inches]

#### **Ordering Information**

	KF 40	ISO 63	CFF 4.5 in.
TPS-mini	G8703A#020	G8703A#021	G8703A#022
Accessories			
DIY Full Range Gauge Kit*	9699190	9699192	9699193
Mains cable EU plug**, 3 meters	9699957	9699957	9699957
Mains cable NEMA plug**, 3 meters	9699958	9699958	9699958
Serial Cable and A-Plus Software ***	9699883	9699883	9699883
Inlet Screen for TwisTorr 74 FS Turbo Pump	9699309	9699300	9699300


NOTE Special Vent Valve available on request

\* The DIY Gauge Kit can be ordered separately, and includes Full Range Gauge FRG-700, Cable for gauge connection, Vacuum Tee and Connecting Hardware (Flanges according to the System inlet flange)

\*\* Power Cord to be ordered separately


\*\*\* Software available for free download at: https://www.agilent.com/en/products/software-informatics/vacuum-products-data-management/a-plus-software

#### **Outline Drawing**



162.0 [6.38]

CFF 4.5 inch. ISO 63





353.1 [13.90]

United States Agilent Technologies Toll free: +1 800 882 7426 vpl-customercare@agilent.com

**Europe and other countries** Agilent Technologies Italia SpA Toll free: 00 800 234 234 00 vpt-customercare@agilent.com

This information is subject to change without notice.

© Agilent Technologies, Inc. 2018 Published in the USA, November 15, 2018 5994-0538EN

